


# Main Ideas of Second Order Sliding Mode Control

Leonid Fridman



Facultad de Ingeniería, UNAM

April 6, 2019


# Idea of SOSMC.

## Idea

Substitute a discontinuous control with a continuous one.

## Presence of actuators.


Presence of actuator is growing the relative degree of the system.




# Idea of SOSM.

## Main Idea


The idea is to reach  $s = 0$  and  $\dot{s} = 0$ .

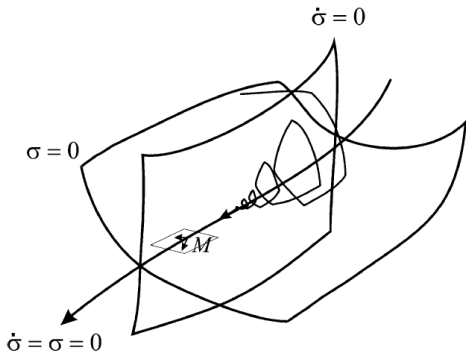


# Twisting phase plane



$$\ddot{x} = -b_1 \text{sign}(x) - b_2 \text{sign}(\dot{x}), \quad b_1 > b_2 > 0$$

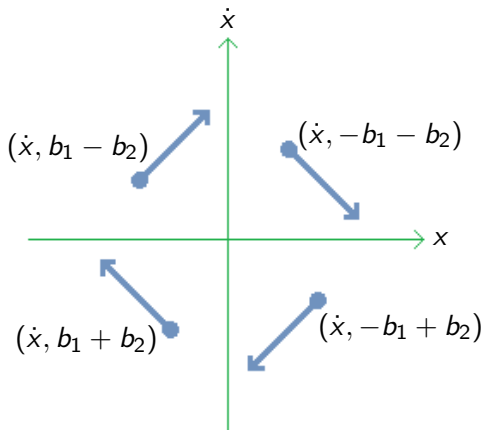

# Twisting Algorithm Convergence



To describe the system behavior in the phase plane is convenient


$$\ddot{x} = \frac{d\dot{x}}{dt} = \frac{d\dot{x}}{dx} \frac{dx}{dt} = \frac{d\dot{x}}{dx} \dot{x} = -b_1 \text{sign}(x) - b_2 \text{sign}(\dot{x})$$

or


$$\frac{d\dot{x}}{dx} = \frac{-b_1 \text{sign}(x) - b_2 \text{sign}(\dot{x})}{\dot{x}}$$

# Trajectories of Twisting Algorithm

$$\ddot{x} = -b_1 \text{sign}(x) - b_2 \text{sign}(\dot{x}), \quad b_1 > b_2 > 0$$

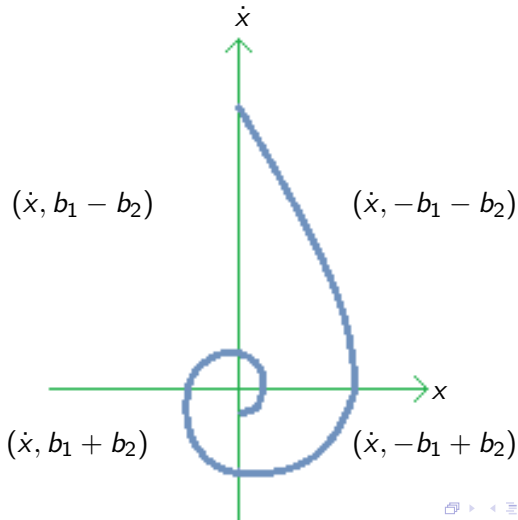

# Twisting Algorithm Convergence




$$\dot{x}d\dot{x} = -(b_1 + b_2)dx$$
$$\frac{1}{2}\dot{x}^2 = -(b_1 + b_2)x - x_1$$

for  $\dot{x} > 0$

$$x = x_1 - \frac{\dot{x}^2}{2(b_1 + b_2)}$$

for  $\dot{x} \leq 0$

$$x = x_1 - \frac{\dot{x}^2}{2(b_1 - b_2)}$$

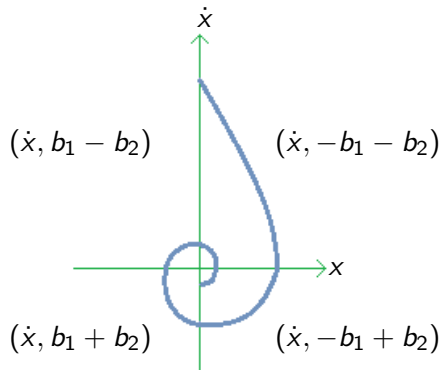

# Twisting Algorithm Convergence

For  $x = 0, \dot{x} = \dot{x}_0$

$$0 = x_1 - \frac{\dot{x}_0^2}{2(b_1 + b_2)}$$


$$\implies \dot{x}_0^2 = 2(b_1 + b_2)x_1$$

For  $x = 0, \dot{x} = \dot{x}_1$

$$\dot{x}_1^2 = 2(b_1 - b_2)x_1$$

Convergence rate

$$\frac{|\dot{x}_1|}{|\dot{x}_0|} = \sqrt{\frac{b_1 - b_2}{b_1 + b_2}} := q < 1$$

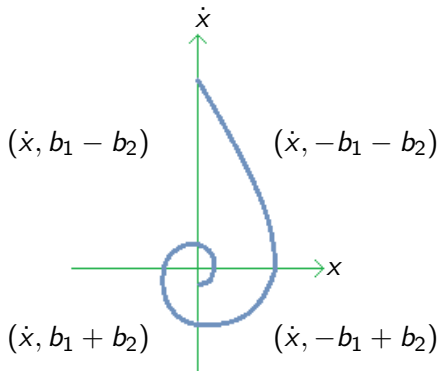




# Twisting Algorithm Convergence

Extending the trajectory to  $x < 0$  and using the same reasoning in successive crossing of  $x = 0$  axis we obtained

$$\frac{|\dot{x}_{i+1}|}{|\dot{x}_i|} = q < 1$$

thus, the algorithm converge to origin. The real trajectory consist of infinite number of segments belonging to  $x \geq 0$  and  $x \leq 0$ , the convergence time can be estimated.

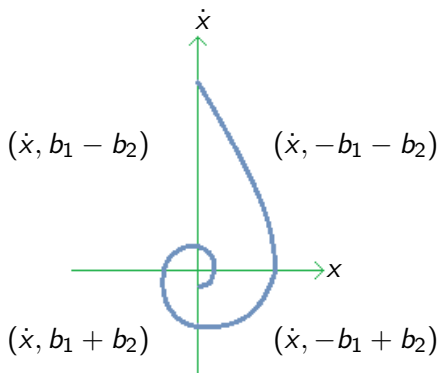

# Twisting Algorithm Convergence

$$\dot{x} > 0, x > 0,$$


$$\ddot{x} = -b_1 \text{sign}(x) - b_2 \text{sign}(\dot{x})$$

$$\dot{x}(t) = -(b_1 + b_2)t + \dot{x}_0$$

$$\dot{x}(t_1^+) = 0 \implies t_1^+ = \frac{\dot{x}_0}{b_1 + b_2}.$$

$$x(t) = -\frac{1}{2}(b_1 - b_2)t^2 + x_1$$

$$\begin{aligned} t_1^- &= \sqrt{\frac{2x_1}{b_1 - b_2}}, \\ &= \sqrt{\frac{1}{(b_1 - b_2)(b_1 + b_2)}} \dot{x}_0 \end{aligned}$$

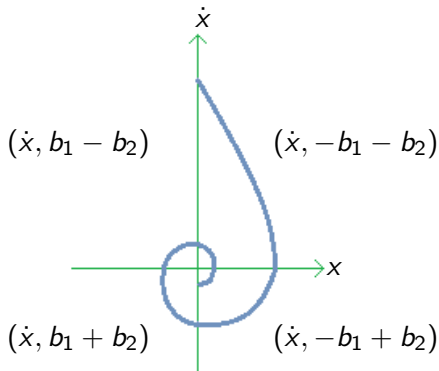

# Twisting Algorithm Convergence

Then the time

$$t_1 := t_1^+ + t_1^- = \eta \dot{x}_0, \text{ con } \eta = \frac{1}{b_1 + b_2} + \sqrt{\frac{1}{(b_1 - b_2)(b_1 + b_2)}}$$

corresponds to the trajectory  $\dot{x}_0 x_1 \dot{x}_1$ . In the same way, the time


$$t_i = \eta |\dot{x}_{i-1}| = \eta q^{i-1} \dot{x}_0$$

corresponds to the trajectory  $\dot{x}_{i-1} x_i \dot{x}_i$ . In this case, the total convergence time is

$$T = \sum_{i=1}^{\infty} t_i = \sum_{i=1}^{\infty} \eta |\dot{x}_{i-1}| = \sum_{i=1}^{\infty} \eta q^{i-1} \dot{x}_0 = \frac{\eta \dot{x}_0}{1 - q}$$

Zeno phenomenon

# Twisting Algorithm for Perturbed Systems



$$\ddot{x} = a(t, x) + b(t, x)u, \quad |a(t, x)| \leq C, \quad 0 < K_m \leq b(t, x) \leq K_M,$$

The control

$$u = -b_1 \text{sign}(x) - b_2 \text{sign}(\dot{x}), \quad b_1 > b_2 > 0$$

## Lemma

Let  $b_1$  and  $b_2$  satisfy the conditions

$$K_m(b_1 + b_2) - C > K_M(b_1 - b_2) + C, \quad K_m(b_1 - b_2) > C.$$

Then, the controller  $u$  provides for the appearance of a 2-sliding mode  $x = \dot{x} = 0$  attracting the trajectories of the system in finite time.

# Twisting Algorithm for Perturbed Systems


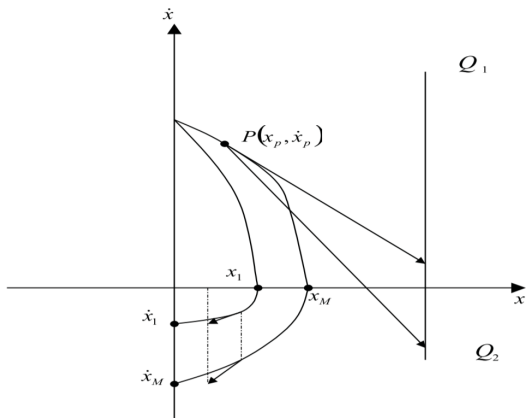


Figure: Majorant curves of the twisting controller.

# Suboptimal Algorithm



where

$$r_1 - r_2 > \frac{C}{K_m},$$

$$r_1 + r_2 > \frac{4C + K_M(r_1 - r_2)}{3K_m},$$


Consider

$$\ddot{\sigma} \in [-C, C] + [K_m, K_M] u,$$

The suboptimal controller is given by

$$u = r_1 \text{sign}(\sigma - \sigma^*/2) + r_2 \text{sign}(\sigma^*),$$

$$r_1 > r_2 > 0,$$



# Suboptimal Algorithm





Figure: Bartolini's workgroup.

# Terminal Sliding Mode Surface



$$\begin{aligned}\dot{x}_1 &= x_2, & \dot{x}_2 &= u(x), \\ u(x) &= -\alpha \operatorname{sign}(s(x)), \\ s(x) &= x_2 + \beta \sqrt{|x_1|} \operatorname{sign}(x_1).\end{aligned}$$



Figure: Prof. Z. Man



# Terminal Sliding Variable

Time derivative of the switching surface


$$\dot{s}(x) = \dot{x}_2 + \beta \frac{x_2}{2\sqrt{|x_1|}} = -\alpha \operatorname{sign}(s(x)) + \beta \frac{x_2}{2\sqrt{|x_1|}}.$$

- $s(x)$  is singular for  $x_1 = 0$ , and **the relative degree of the switching surface does not exist**
- On  $x_2 = -\beta\sqrt{|x_1|} \operatorname{sign}(x_1)$

$$\dot{s} = -\alpha \operatorname{sign}(s(x)) - \frac{\beta^2}{2} \operatorname{sign}(x_1).$$


- Two types of behavior for the solution of the system are possible

# Two types of behavior




## Terminal mode:

- $\beta^2 < 2\alpha$ ,
- Trajectories of the system reach the surface  $s(x) = 0$  and remain there.




## Twisting mode

- $\beta^2 > 2\alpha$
- Trajectories do not slide on the surface  $s(x) = 0$



# How to overcome the Singularity?



Singularity can be overcome by rewriting the function  $s$

$$\bar{s}(x) = \beta^2 x_1 + x_2^2 \operatorname{sign}(x_2).$$

# Quasi-Continuous Algorithm

This algorithm is given by

$$u = -\alpha \frac{\dot{\sigma} + \beta|\sigma|^{1/2}\text{sign}(\sigma)}{|\dot{\sigma}| + \beta|\sigma|^{1/2}}$$


where

$$\alpha, \beta > 0, \quad \alpha K_m - C > 0,$$

and the inequality


$$\alpha K_m - C - 2\alpha K_m \frac{\beta}{\rho + \beta} - \frac{1}{2}\rho^2 > 0,$$

must be satisfied for some positive  $\rho > \beta$ .

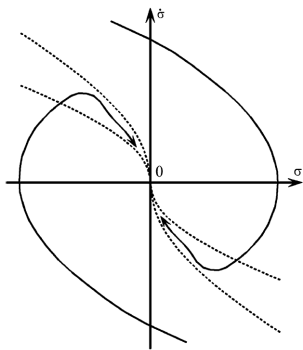

**Figure:** Trajectories of the quasi-continuous controller.

# Anti-chattering Strategy



$$\dot{X} = F(t, X) + G(t, X)u, X \in R^n, u \in R, |F| < F^+,$$


The switching variable  $\sigma(X) : \dot{\sigma} = f(\sigma, t) + g(\sigma, t)u$ .

Anti-chattering strategy:

**Add an Integrator in control input:**

If  $\dot{u} = v = -a \text{sign}(\dot{\sigma}(t)) - b \text{sign}(\sigma(t))$ , so  $u$  is a Lipschitz continuous control signal ensuring finite-time convergence to  $\sigma = 0$

# Anti-chattering Strategy




**Criticism(1987)** If it is possible to measure  $\dot{\sigma} = f(t, \sigma) + g(t, \sigma)u$ , then the uncertainty  $f(t, \sigma) = \dot{\sigma} - g(t, \sigma)u$  is also known and can be compensated without any discontinuous control!

## Counter-argument


If  $g$  is uncertain so  $\ddot{\sigma}$  depends on  $u$  through uncertainty! The anti-chattering strategy is reasonable for the case of uncertain control gains.

# Discussion about SOSM



## Advantages of SOSM

- 1 Allows to compensate **bounded** matched uncertainties for the systems with relative degree two **with discontinuous control signal**
- 2 Allows to compensate **Lipschitz** matched uncertainties with continuous control signal using the first derivative of sliding inputs
- 3 Ensures quadratic precision of convergence with respect to the sliding output
- 4 For one degree of freedom mechanical systems: the sliding surface design is no longer needed.
- 5 For systems with relative degree  $r$ : the order of the sliding dynamics is reduced up to  $(r - 2)$ . The design of the sliding surface of order  $(r - 2)$  is still necessary!



- To reduce the chattering substituting **discontinuous control signal with continuous one** the derivative of the sliding input still needed!
- The problem of exact finite-time stabilization and exact disturbance compensation for SISO systems with arbitrary relative degree remains open. More deep decomposition is still needed
- Theoretically exact differentiators are needed to realize theoretically exact compensation of the Lipschitz matched uncertainties